



GPS Phone Watch

Model NO.: R13S

User Manual

Version 1.0

1. Products Introduction.....	2
2. Appearance and interface.....	2
2.1. Appearance.....	2
2.2. Interface.....	2
3. How do we use the watch.....	3
3.1. Install the APP and register user account.....	3
3.2. Register your watch in APP.....	3
3.3. Track your watch in APP.....	4
3.3.1. Locate immediately.....	4
3.3.2. Historical location playback.....	4
3.3.3. Call the watch.....	5
3.3.4. Voice monitoring.....	5
3.4. Set wearer profile.....	6
3.5. Message center.....	6
3.6. Set safe zone.....	7
3.7. Edit related family.....	7
3.8. Manage tools.....	8
3.9. Notes.....	9
4. Feedback and Contact.....	9

1. Product Introduction

Available colors: Blue, Pink.

GPS Phone Watch R12 is designed especially for old person. It is able to realize the features such as real-time tracking, emergency alarm, safe zone alarm, voice message, two way voice communication, water resistance etc. We can get to know the exact situation of wearer remotely by APP on mobile to take care of your beloved one by the watch at any time anywhere.



Picture 1



Picture 2

2. Appearance and interface

2.1 Appearance



Picture 3

Power/SOS key:

For emergency, please press Power/SOS key for 3 seconds,

- 1) R13S will send location to administrator and backup administrator phone numbers.
- 2) R13s will call the phone numbers in the family list for turn until someone answer or hang up the call.
- 3) Short press Power/SOS key or slide up the screen to hand up the call..

2.2 Interface




Picture 4


3. How do we use the watch

3.1 Install the APP and register user account

Please open website www.overseetracking.com and click “Download APP” to download “Rtrac S”, or search “Rtrac S” in APP Store and Google Play to down it, and then use your email address to register a new user. Please use the correct email address since it will be used for receiving verifying code and recover the password in case you forgot.

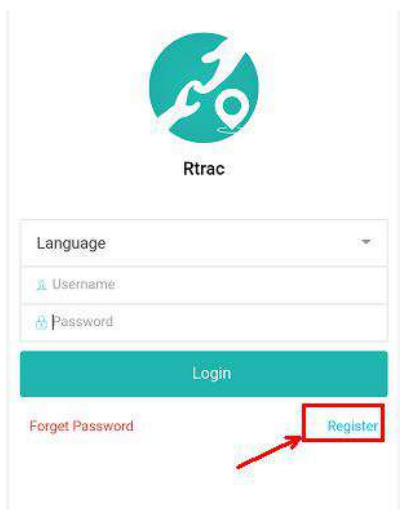

Picture 5

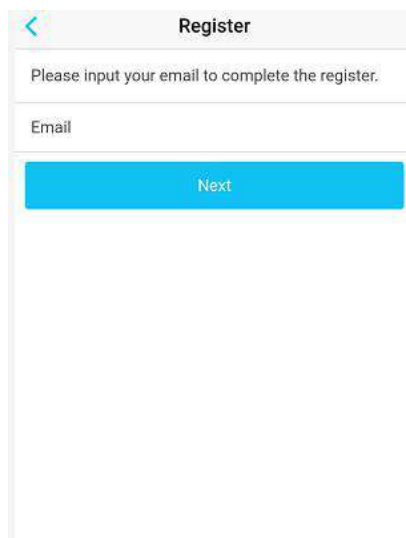


Picture 6

3.2 Register your watch in APP

Register your watch:

Please purchase a micro SIM card and ensure it has caller ID, SMS, voice communication and GPRS features, please insert the SIM card to the slot with chipset upwards as per the picture 6 displayed when the watch is powered off.




Picture 7

After registered user account, login and click  at the top right corner to add New Tracker .



Picture 8

3.3 Input the IMEI number or Scan the watch QR Code(on the watch back cover) to activate watch, then press Next, the watch will be activated.

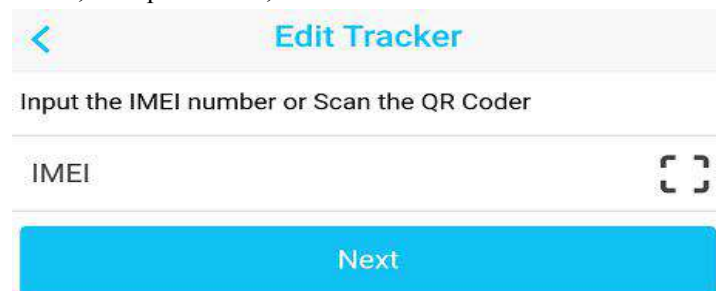

Picture 9

If the watch is not activated successful, please send two SMS to set APN, IP and port.

A. APN setting: #862182,STAPN:apn,0,0,0.0.0.0,0,,,,,APN_username,APN_password


For example: #862182,STAPN:CMNET,0,0,0.0.0.0,0,,,,,

B. IP and port setting: #862182,SETIP:47.90.241.102,7003

After you received reply from two SMS, take the watch to walk for a while, it should be activated successful.

3.3 Track your watch in APP

3.3.1 Locate immediately

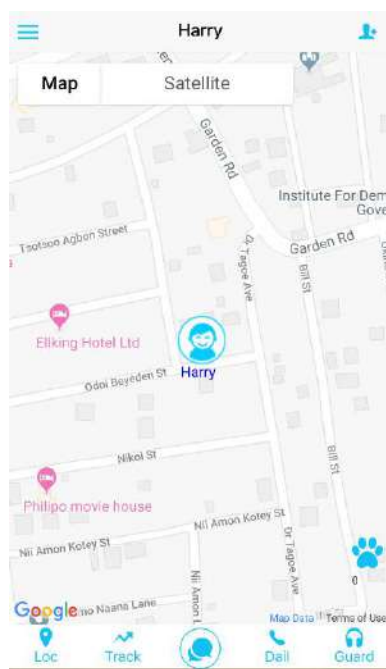


Picture 10


After registered the watch, we suggest you take the watch in the open air for several seconds, the APP will show correct GPS location later on. The watch will continuously upload the GPS location every minute while you are moving, and switch into saving battery mode when you stop. If you want to know the latest location as soon as possible, please click Loc button to get the current location immediately. If you are staying under roof, the watch will switch to LBS location mode, and there would be indicator respectively clarifying in the map.

3.3.2 Historical location playback

Please click the “Track” button below the map in APP, and select the date when the interface pops up. You will get the historical location accordingly as per the picture 10 after confirming OK button, and if you need more detailed information from history, please tick the LB&WIFI option.

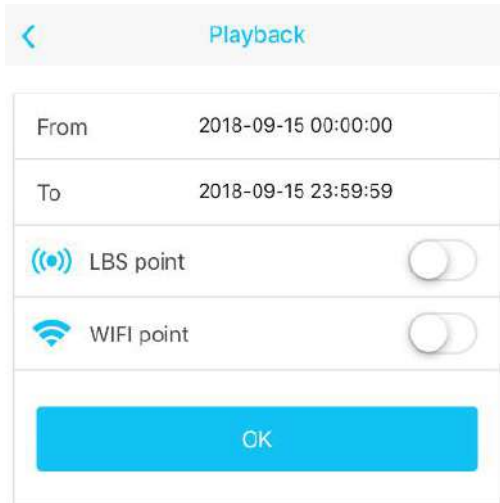

Picture 11

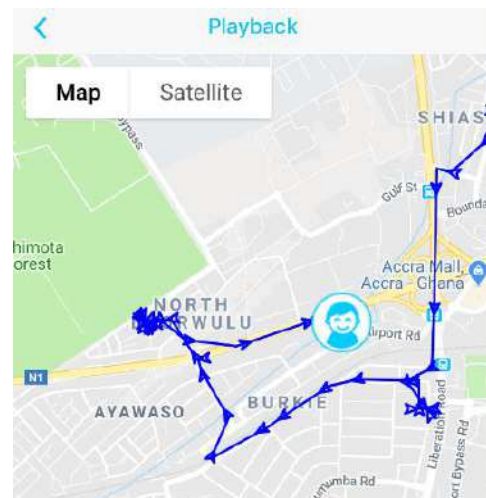

Picture 12

3.3.3 Call the watch


Please click the “Dial” button to call the watch, please note that only the phone number from the family list can call to the watch. Wearer can answer the call by shortly press the “Function” key in watch and reject it by shortly press the “Power on” key.

3.3.4 Voice monitoring

Pls click the “Guard” button below the map in APP, your mobile will call to the watch without ring tone and be picked up automatically, then you can listen the voice around the wearer silently. Please note that only the administrator and backup administrator can use this function.

3.4 Set Tracker Profile


You can change the image, phone number, and other detailed information of wearer here.

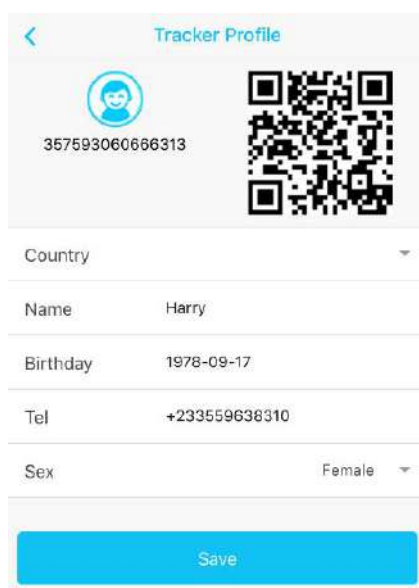

Picture 13

3.5 System Message

it contains all kinds of alerts information such as Exit alerts, Enter alerts, Low battery alerts, SOS alerts etc.

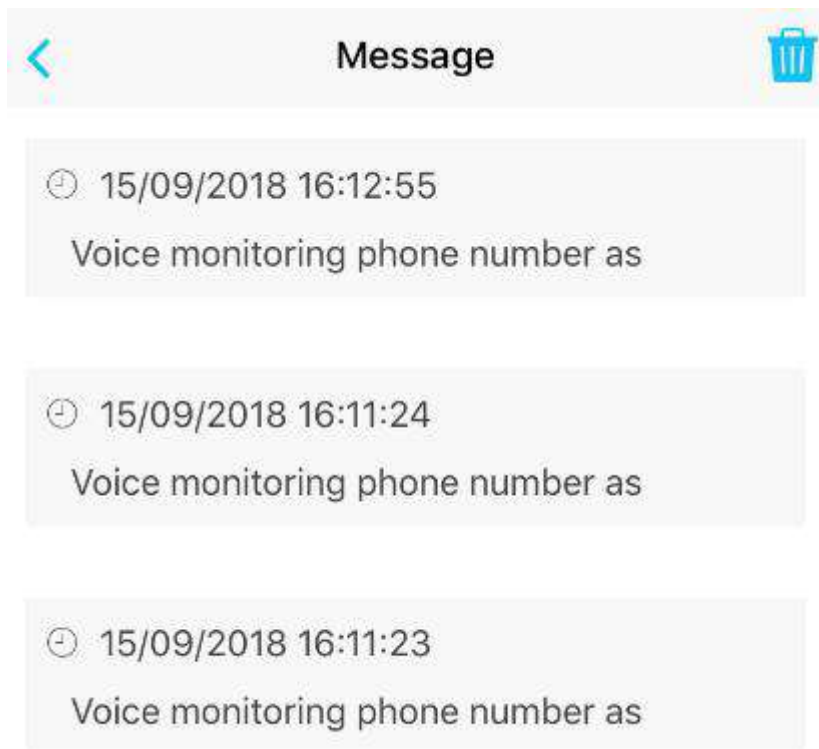


Picture 14

3.6 Set safe zone

The APP allows you to set maximum 10 safe zones for the watch. You can edit the fence size if you are creating or have created by changing the diameter on map from 500m to 2000m. There is setting option below which is used for set Exit or Enter alerts for the registered watches in APP.

3.7 Edit Related Family

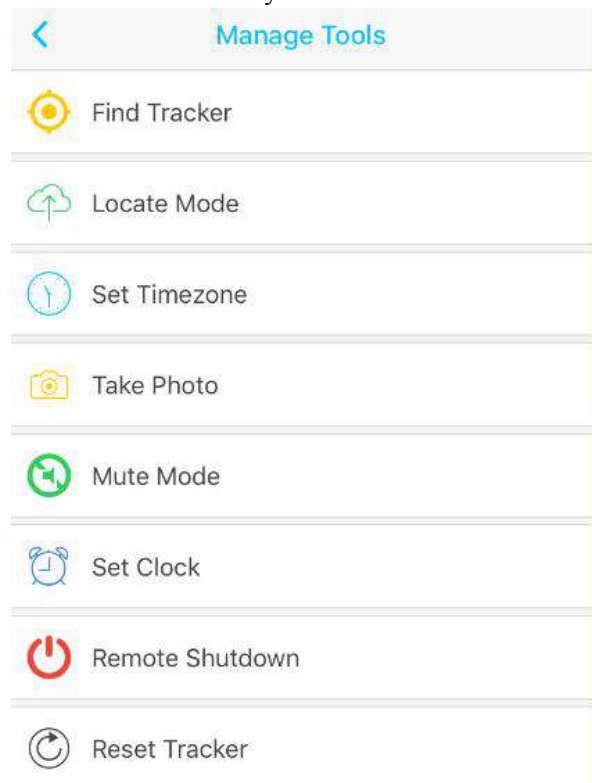

Your APP user account registered phone number is binding to the family contact list automatically, and you can add maximum 12 more phone numbers into this list.

3.8 Manage tools



If you forget where the watch is , please use this function to make the watch ring until you click any key on the watch.



Locate Mode

There are two different modes for location: Precision mode and Manual mode

The Precision mode means the watch will auto-upload the location data to APP every 60S.

The Manual mode means the watch is required to upload location data when you click the “Loc” button in APP, in this mode, you can prolong the battery life of watch.



Set Timezone

You can correct the time on the watch from here, it will be automatically synchronize with the watch.



Take Photo

If the watch has a camera, click this button to make it take a photo..



Mute Mode

The watch will ring once receiving call or voice message, if you enable the mute feature, it will be silent when receiving call or voice message.



Set Clock

.You can set alarm clock here to remind wearer to get up or visit some place etc. Wearer can end the alarm by pressing the power on button in watch.



Remote Shutdown

After inserting the SIM card, the watch cannot be powered off by press the “ON/SOS button”, it can only be switched off remotely by parents through APP



Reset Tracker

You will delete all family contact list and recover the watch to factory setting mode. Please be careful to use this feature.

3.9 Notes

- The watch can be powered off by pressing the “ON/SOS” button without SIM card inside, otherwise, you will have to switch it off from APP
- Please recharge the watch by USB cable. First charging time should be no less than 12 hours,



and daily charging time should be no less than 8 hours.

- This watch is water resistance only, please note that it cannot be used in swimming pool or taking shower.

4. Feedback and Contact

We are glad to see you choose the R11 watch, for more details, please check on our website <http://www.ropetrack.com>, if you have any questions or want to give us suggestion, please submit on the website, or contact us in other ways:

Address: Room 306-309, Floor 3rd, NO.1 Idea Bank of TGK Technology Park, Chuangye Road 2, The 72nd Zone of Bao'an, Shenzhen, China

Phone: +86-755-23085553

E-Mail: sales@myrope.cn, service@myrope.cn